

**THERMAL AND MOISTURE
PERFORMANCE OF CONCRETE DURING
THE EARLY AGES OF DRYING**


THESIS
Submitted for the Degree of Ph.D.

IN
PHYSICS

530.41

M.A

TO
Physics Department
Faculty of Science
Ain Shams University

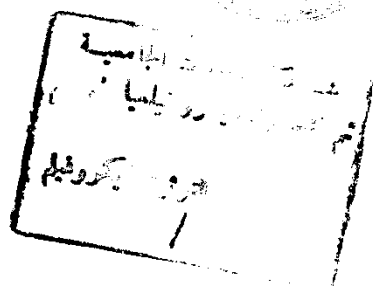

60895

By
MAGDY ABD EL-HAMEED AHMED HELAL

(B.Sc. , M.Sc.)

Building Research Center, Cairo

1996



AIN SHAMS UNIVERSITY
FACULTY OF SCIENCE

ACKNOWLEDGEMENT

I wish to express my deep gratitude to Prof. Dr. Mohamed Fathy Kotkata, Physics Department, Ain Shams University, for his supervision and continuous advise.

I wish to express my deep gratitude to Prof. Dr. Eng. Hamdy Hamed Shaheen, Professor and Head of Reinforced Concrete Department, Building Research Center, for his supervision, encouragement and valuable discussions.

I wish to express my deep thanks to Dr. Mohamed Mahmoud Abd EL-Razek, Building Physics Department, Building Research Center, for valuable discussions and encouragement.

Tanks to all my colleagues at the Building Physics Department, Building Research Center.

Thanks are also to Prof. Dr. M. Ramez, Chairman of the Building Research Center and Prof. Dr. M.A. EL-Sharkawy, Head of Physics Department of the Faculty of Science, Ain shams University.

CONTENTS

	Page
LIST OF FIGURES	v
LIST OF TABLES	xii
KEY WORDS	xiii
ABSTRACT	xv
GENERAL INTRODUCTION	1
CHAPTER 1 CLIMATIC FACTORS OF EGYPT AND REVIEW OF PREVIOUS WORK	6
1.1 CLIMATIC FACTORS OF EGYPT	6
1.1.1 Solar Radiation	6
1.1.2 Wind Speed	7
1.1.3 Relative Humidity	7
1.1.4 Air Temperature	7
1.2 PREVIOUS WORK	11
1.2.1 Concrete and Environment	11
1.2.2 Heat of Hydration	15
1.2.3 Moisture Diffusion	19
1.2.4 Drying Shrinkage	23
1.2.5 Curing	27

	Page
CHAPTER 2	
THEORETICAL ANALYSIS OF HEAT AND MASS TRANSFER THROUGH CONCRETE	31
2.1 CONCRETE AS A MULTI PHASE MATERIAL	31
2.2 MOISTURE PERFORMANCE OF FRESH CONCRETE	32
2.3 SOLAR RADIATION ON HORIZONTAL SURFACES	38
2.4 STATEMENT OF THE PROBLEM	39
2.5 BOUNDARY CONDITIONS OF THE PROBLEM	42
2.6 THE FINITE DIFFERENCE PROCEDURE	46
2.7 THE HEAT BALANCE EQUATIONS.	47
2.8 THE MOISTURE BALANCE EQUATIONS.	50
2.9 ALGORITHM TO SOLVE THE PROBLEM IN THE FINITE DIFFERENCE FORM USING MICRO COMPUTERS.	54
2.10 EVAPORATION RATE AT CONTROLLED CONDITIONS	55
2.11 THE PERFORMANCE THROUGH FRESH CONCRETE EXPOSED TO DIRECT SOLAR RADIATION	68

	Page
CHAPTER 3	
EXPERIMENTAL PROGRAM AND INSTRUMENTATION	70
3.1	VARIABLES CONSIDERED 70
3.2	EXPERIMENTAL PROGRAM 71
3.2.1	Materials and Preparation of Concrete Mixes 71
3.2.2	Samples Description 72
3.3	MEASUREMENTS AND INSTRUMENTS 80
3.3.1	Loss of Weight 80
3.3.2	Volume Change of Concrete "Shrinkage" 83
3.3.3	Temperature Distribution 84
3.3.4	Moisture Distribution 84
3.3.5	Climatic Data 87
3.3.6	Thermophysical Properties 87
CHAPTER 4	
LOSS OF WATER AND SHRINKAGE OF CONCRETE AT EARLY AGES	90
4.1	THERMOPHYSICAL PROPERTIES 90
4.2	LOSS OF WATER FROM FRESH CONCRETE 92
4.2.1	Water Cement Ratio and Cement Content 92
4.2.2	Aggregate Type 97
4.2.3	Exposure Conditions 99
4.2.4	Relative Humidity 102
4.2.5	Surface Temperature 104

	Page
4.2.6 Curing Time	106
4.3 SHRINKAGE OF FRESH CONCRETE	107
4.3.1 Water Cement Ratio	107
4.3.2 Temperature of the Top Surface	110
CHAPTER 5 THERMAL AND MOISTURE PERFORMANCE THROUGH FRESH CONCRETE	116
5.1 TEMPERATURE DISTRIBUTION THROUGH FRESH CONCRETE	116
5.1.1 Water Cement Ratio	116
5.1.2 Constant External Thermal Source	117
5.1.3 Curing Method and Timing	119
5.2 MOISTURE DISTRIBUTION THROUGH FRESH CONCRETE	148
5.2.1 Water Cement Ratio	148
5.2.2 Constant External Thermal Source	154
5.2.3 Curing Method and Timing	154
CONCLUSION	171
REFERENCES	175
PUBLISHED ARTICLES FROM THE PRESENT WORK	184
ARABIC SUMMARY	186

LIST OF FIGURES	page
Fig. (1): Annual average distribution of direct solar radition over Egypt in (w/m^2).	8
Fig. (2): Annual average distribution of the diffuse solar radiation over Egypt in (w/m^2).	8
Fig. (3): Distribution of the average wind speed lines for Egypt during winter.	9
Fig. (4): Distribution of the average wind speed lines for Egypt during summer.	9
Fig. (5): Distribution of the mean relative humidity percent through the different seasons in Egypt.	10
Fig. (6): Distribution of the mean maximum temperature in $^{\circ}\text{C}$ through the different seasons in Egypt.	12
Fig. (7): Distribution of the mean minimum temperature in $^{\circ}\text{C}$ through the different seasons in Egypt.	13
Fig. (8): Model of concrete, mortar or cement paste.	33
Fig. (9): Moisture at various stages in the drying of a porous material.	33
Fig. (10): Heat transfer modes on drying	37
Fig. (11): The space time grid.	46
Fig. (12): The monthly mean outdoor air temperature and relative humidity variation in some cities in Egypt.	56
Fig. (13): The calculated monthly mean solar radiation incident on some cities in Egypt through the year.	57
Fig. (14): The calculated monthly mean evaporation rate in some cities in Egypt.	57

	page
Fig. (15. a,b) : The variation of evaporation rate with relative humidity at different wind speed and constant temperature, (20, 30 $^{\circ}$ C).	59
Fig. (15. c,d) : The variation of evaporation rate with relative humidity at different wind speed and constant temperature, (40, 50 $^{\circ}$ C).	61
Fig. (16. a,b) : The variation of evaporation rate with relative humidity at different temperature and constant wind speed, (2,4 m / s).	62
Fig. (16. c,d) : The variation of evaporation rate with relative humidity at different temperature and constant wind speed, (10,20 m / s).	63
Fig. (17. a,b) : The variation of evaporation rate with wind speed at different relative humidity and constant temperature, (20, 30 $^{\circ}$ C).	64
Fig. (17. c,d) : The variation of evaporation rate with wind speed at different relative humidity and constant temperature, (40, 50 $^{\circ}$ C).	65
Fig. (18. a,b) : The variation of evaporation rate with wind speed at different temperature and constant relative humidity, (80,60 %).	66
Fig. (18. c,d) : The variation of evaporation rate with wind speed at different temperature and constant relative humidity, (40, 20 %).	67
Fig. (19) : The computed temperature and moisture distribution within different depths.	69

	page
Fig. (20) : The samples in the desiccator and in the indoor environment.	75
Fig. (21) : The samples in the different techniques for exposure conditions.	75
Fig. (22): Position of the external thermal source over the specimens.	78
Fig. (23) : The samples in the field over the roof.	79
Fig. (24) : Distribution of the thermocouples and electrodes in the specimens.	82
Fig. (25) : Schematic diagram of the apparatus.	85
Fig. (26) : The optical system of the apparatus.	86
Fig. (27) : Thermal Conductivity meter model TC-32.	89
Fig. (28) : The time-water loss relationship for three water cement ratios at different cement doses through the first 7 hours after casting.	94
Fig. (29) : The time-water loss relationship for three water cement ratios at different cement doses through the first 7 days after casting.	96
Fig. (30) : The time-water loss relationship for the two types of aggregate.	98
Fig. (31) : The time-water loss relationship for different climatic conditions.	100
Fig. (32) : The time-water loss relationship for two water cement ratio in two relative humidity values for the first week after casting.	103

	page
Fig. (33) : The change in the water loss and surface temperature with time for the three external thermal source applied for the first 12 hours only after casting.	105
Fig. (34) : The time-water loss relationship for the three samples with three different curing time through the first week from casting.	105
Fig. (35) : The relations between shrinkage and time for three water cement ratio 0.4, 0.5, an 0.6 through the first two days	108
Fig. (36) : The relations between shrinkage and time for three different surface temperature	111
Fig. (37) : The time water loss relationship for three water cement ratios through the first 12 hours.	113
Fig. (38) : The relations between shrinkage and time for three water cement ratios through the first 12 hours.	113
Fig. (39) : The relationship between the water loss and shrinkage for various water cement ratios.	114
Fig. (40) : The temperature variation at different depths within the three mixes through the first 10 hours after cast in the indoor conditions	118
Fig. (41) : The temperature distribution at exposed and bottom surfaces with time for three external thermal sources through the first 12 hours after casting	120
Fig. (42) : The temperature distribution through the sample ' C ' during the drying period.	121
Fig. (43) : The temperature distribution through the sample ' D ' during the drying period.	124

	page
Fig. (44) : The temperature distribution through the sample " A "	
during the drying period.	127
Fig. (45) : The temperature distribution through the sample " B "	
during the drying period.	130
Fig. (46) : The temperature distribution through the sample " F "	
during the drying period.	132
Fig. (47) : The temperature distribution through the sample " E "	
during the drying period.	135
Fig. (48. a,b) : Comparison between the temperature performance	
through " C " and " D " samples at the first 48	
hours, (Stream and Exposed).	137
Fig. (48. c,d) : Comparison between the temperature performance	
through " C " and " D " samples at the first 48	
hours, (Middle and Bottom).	139
Fig. (49. a,b) : Comparison between the stream and exposed surface	
temperatures performance for the three samples	
"A", " B " and " E " through the 48 hours after	
casting.	141
Fig. (49. c,d) : Comparison between the stream and exposed	
surface temperatures performance for the three	
samples " A ", " B " and " E " through the 7	
days after casting.	143
Fig. (50. a,b) : Comparison between the stream and exposed	
surface temperatures performance for the two	
samples " B " and " F " through the 48 hours	
after casting.	144

Fig. (50, c,d) : Comparison between the stream and exposed surface temperatures performance for the two samples " B " and " F " through the 7 days after casting.	146
Fig. (51) : The temperature distribution within the sample "C" through the first and second day after casting.	147
Fig. (52) : Comparison between measured and calculated temperature distribution through different depths in "C" sample.	149
Fig. (53.a) : The electrical resistance performance within different zones for three water cement ratio through the first 12 hours.	151
Fig. (53.b) : The electrical resistance performance within different zones for three water cement ratio through the first 7 days.	152
Fig. (54. a,b) : The electrical resistance performance within different zones of samples 2 and 28 through the first 12 hours after casting.	155
Fig. (54 c,d) : The electrical resistance performance within different zones of samples 29 and 30 through the first 12 hours after casting.	156
Fig. (55) : The electrical resistance change with time within the sample " C " through the 7 days after casting.	158
Fig. (56) : The electrical resistance change with time within the sample " A " through the 7 days after casting.	159
Fig. (57) : The electrical resistance change with time within the sample " B " through the 7 days after casting.	161