




CORROSION OF SOME COPPER ALLOYS IN SALINE WATER CONTAINING POLLUTANTS

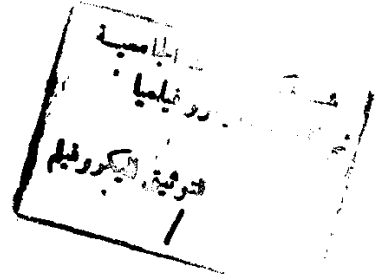

A thesis

*Submitted in Partial Fullfillment for the
Master Degree of Science
(Chemistry)*

546.652
N. S.

By

نائلة

63727

Nahla Ismail Abdel Salam

The National Research Center (NRC)

Faculty of Science
Ain Shams University

1997



APPROVAL SHEET

Name : Nahla Ismail Abdel Salam


Title : Corrosion of Some Copper Alloys in Saline Water
Containing Pollutants.

Supervisors

1- Dr. Khaled M. Elewa Hashem

2- Prof. Dr. S.M. Said


Approved

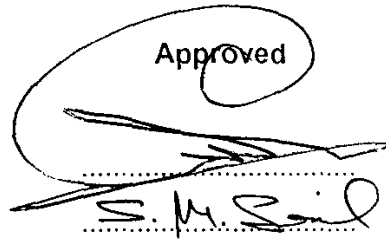

S.M. Said

Credit

Prof. Dr. A.F. Fahmy



A.F. Fahmy

Head of Chemistry Department

ACKNOWLEDGEMENT

The author would like to express her gratitude to Dr. A.M. Abd El-Halim Prof. of Physical Chemistry, Faculty of Science, Ain Shams University for his interest, encouragement, help and support of this work.

The author wants to thank Dr. Khaled Elewa Hashem Dr. of Physical Chemistry, Faculty of Science, Ain Shams University for his valuable and useful discussions and also for his help.

The author is particularly indebted to Dr. S.M. Said Prof of Physical Chemistry (NRC) for suggesting the problem, supervision, the very considerable help and guidance during the different stages of the work.

The author is grateful to her colleagues at the Physical Chemistry Department (NRC) and to all those who helped her during the work in this thesis.

CONTENT

	Page
ABSTRACT.....	i
CHAPTER 1. Introduction	
1. Introduction.....	1
1.1 Corrosion of Cu-base alloys in seawater.....	4
1.2 Corrosion of Cu-alloys in polluted seawater.....	12
1.2.1. Corrosion of Cu-base alloys in seawater contaminated with ammonia.....	14
1.2.2. Corrosion in seawater contaminated with sulphide.....	15
CHAPTER 2. Experimental	
2. Experimental.....	25
2.1. Specimens.....	25
2.2. Electrolytic solutions.....	26
2.3. Electrochemical polarization measurements.....	26
2.4. Performance of an experiment.....	29
2.5. Open circuit measurements.....	29
2.6. Performance of the experiment.....	29
2.7. Weight-loss measurements.....	30
2.8. Metallographic investigations.....	30
2.9 X-ray diffraction analysis.....	30
CHAPTER 3. Results and Discussion	
3. Results and Discussion.....	32
3.1. Corrosion behaviour of Cu-alloys in NaCl solutions containing additives of ammonia.....	32

	Page
3.1.1 Results.....	32
3.1.1.1 Potential-time measurements.....	32
3.1.1.2 Polarization measurements.....	34
3.1.1.3. Weight-loss measurements.....	35
3.1.1.4. Microscopic investigations.....	36
3.1.1.5 X-ray diffraction analysis.....	39
3.1.2. Discussion.....	41
3.2. Corrosion behaviour of Cu alloys in NaCl solutions containing additives of sulphide ion.....	64
3.2.1 Results.....	64
3.2.1.1 Potential-time measurements.....	64
3.2.1.2 Polarization measurements.....	68
3.2.1.3 Microscopic investigations.....	69
3.2.1.4. X-ray diffraction analysis.....	71
3.2.2. Discussion.....	72
 CHAPTER 4	
Summary.....	89
References.....	93
Arabic Summary.....	

LIST OF FIGURES

	Page
Fig. (1) The Potential-time and Polarization cells.....	28
Fig. (2) Potential-time curve of brass alloy in 3.4% NaCl solution contaminated with increasing additions of ammonia.....	47
Fig. (3) Potential-time curve of Al-bronze alloy in 3.4% NaCl solution contaminated with increasing additions of ammonia.....	48
Fig. (4) Potential-time curve of Cu-Ni 90:10 alloy in 3.4% NaCl solutin contaminated with increasing additions of ammonia.....	49
Fig. (5) The steady state potential vs concentration of NH_4OH for copper -base alloys.	50
Fig. (6) Polarization curve of brass alloy in 3.4% NaCl solution contaminated with increasing additions of ammonia.....	51
Fig. (7) Polarization curve of Al-bronze alloy in 3.4% NaCl solution contaminated with increasing additions of ammonia.....	52
Fig. (8) Polarization curve of Cu-Ni 90:10 alloy in 3.4% NaCl solution contaminated with increasing additions of ammonia.....	53

	Page
Fig. (9) The variation of weight loss of the copper-base alloys during immersion in 3.4% NaCl containing 100 ppm NH_4OH	54
Fig. (10) Optical micrograph showing the appearance of the brass alloy surface after immersion in 3.4% NaCl containing 100 ppm NH_4OH	55
Fig. (11) Scanning Electron micrograph showing the appearance of the brass alloy after immersion in 3.4% NaCl containing 100 ppm NH_4OH	56
Fig. (12) Optical micrograph showing the appearance of the Al-bronze alloy surface after immersion in 3.4% NaCl containing 100 ppm NH_4OH	57
Fig. (13) Scanning electron micrograph showing the appearance of the Al-bronze alloy surface after immersion in 3.4% NaCl containing 100 ppm NH_4OH	58
Fig. (14) Scanning electron micrograph showing the appearance of the Cu-Ni 90: 10 alloy surface after immersion in 3.4% NaCl containing 100 ppm NH_4OH	59
Fig. (15) Optical micrograph showing the appearance of the Cu-Ni (90/10) alloy surface after immersion in 3.4% NaCl solution containing 100 ppm NH_4OH	60

	Page
Fig. (16) The X-ray diffraction chart of the brass alloy surface after immersion in 3.4% NaCl solution in 3.4% NaCl solution containing 100 ppm NH_4OH	61
Fig. (17) The X-ray diffraction chart of Al-bronze alloy surface after immersion in 3.4% NaCl solution containing 100 ppm NH_4OH	61
Fig. (18) The X-ray diffraction chart of Cu-Ni 90 : 10 alloy surface after immersion in 3.4% NaCl solution containing 100 ppm NH_4OH	61
Fig. (19) Potential-time curve of brass alloy in 3.4% NaCl solution contaminated with increasing additions of sulphide.....	76
Fig. (20) Potential-time curve of Al-bronze alloy in 3.4% NaCl solution contaminated with increasing additions of sulphide.....	77
Fig. (21) Potential-time curve of Cu-Ni 90: 10 alloy in 3.4% NaCl solution contaminated with increasing additions of sulphide.....	78
Fig. (22) The steady state potential vs concentration of Na_2S for copper-base alloys.....	79
Fig. (23) Polarization curve of brass alloy in 3.4% NaCl solution contaminated with increasing additions of sulphide.....	80

	Page
Fig. (24) Polarization curve of Al-bronze alloy in 3.4% NaCl solution contaminated with increasing additions of sulphide.....	81
Fig. (25) Polarization curve Cu-Ni 90:10 alloy in 3.4% NaCl solution contaminated with increasing additions of sulphide.....	82
Fig. (26) Scanning Electron micrograph showing the appearance of the brass alloy surface after immersion in 3.4% NaCl solution containing 100 ppm S ²⁻	83
Fig. (27) Scanning electron micrograph showing the appearance of the Al-bronze alloy surface after immersion in 3.4% NaCl containing 100 ppm S ²⁻	84
Fig. (28) Scanning Electron micrograph showing the appearance of the Cu-Ni 90:10 alloy surface after immersion in 3.4% NaCl containing 100 ppm S ²⁻	85
Fig. (29) X-ray diffraction chart of the brass alloy surface after immersion in 3.4% NaCl solution containing 100 ppm Na ₂ S.....	86
Fig. (30) X-ray diffraction chart of the Al-bronze alloy surface after immersion in 3.4% NaCl containing 100 ppm Na ₂ S.....	86
Fig. (31) X-ray diffraction chart of the Cu-Ni 90:10 alloy surface after immersion in 3.4% NaCl containing 100 ppm Na ₂ S.....	86

LIST OF TABLES

	Page
Table 1: X-ray diffraction analysis of corrosion product adhering at α -brass alloy surface after immersion in 0.6M NaCl containing 100 ppm NH_4OH	62
Table 2: X-ray diffraction analysis of corrosion products adhering at Al-bronze alloy surface after immersion in 0.6M NaCl containing 100 ppm NH_4OH	63
Table 3: X-ray diffraction analysis of corrosion products adherening at Cu-Ni 90:10 alloy surface after immersion in 0.6M NaCl containing 100 ppm NH_4OH	63
Table 4 : The corrosion current values by μA measured from Tafel slope of polarization curves.....	44
Table 5: The steady state potential values by mv of alloys under test in 3.4% NaCl containing increasing additives of Na_2S by mg/l.	67
Table 6: X-ray diffraction analysis of corrosion products adhering at brass alloy surface after immersion in 0.6 M NaCl containing 100 ppm Na_2S	87

	Page
Table 7: X-ray diffraction analysis of corrosion products adhering at Al-bronze alloy surface after immersion in 0.6 M NaCl containing 100 ppm Na ₂ S.....	87
Table 8 : X-ray diffraction analysis of corrosion products adhering at Cu-Ni 90:10 alloy surface after immersion in 0.6 M NaCl containing 100 ppm Na ₂ S.....	88